

## MTD\_Fat Client All in




## Article nr. : MTD\_Fat Client All in

MTD Clients	MTD_FAT CLIENT ALL IN
Monitor	23,8 "
Supply voltage	1x 230Vac
Max. ambient temperature	+45°C
Min. ambient temperature	-10 °C
Protection class	IP20
Wired mouse	Optical
Wired keyboard	Querty
Operation system	Windows 10 IoT Enterprise 2021 Matranda standard software
Cables	X

The dashboard of the Fat Client is put together with the client and user, and can feature graphs, push buttons, lights, etc.

The Thick/Fat Client is directly connected to the MTD\_Control Module via the same subnet 'Production Network'.

The MTD Fat Clients are equipped with all Matranda software for interfacing with the MTD Control Module and the MTD Server.

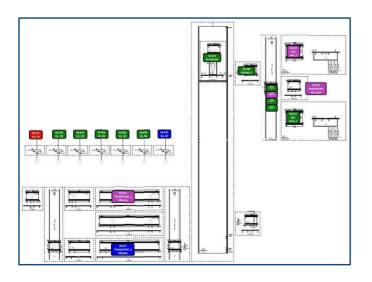

The factory overview software is programmed in the MTD Fat Client. The status of a machine is visible. Which allows immediate intervention. The status of machines/equipment is visualised with a push button. Each colour has a meaning. As soon as the button is pressed, an extra screen will be shown where any malfunction is located, with all documents visualised.

The software is linked to the SVS of the MTD Server. But it can also be further extended for an OEE application, for instance.

