

MTD_Fat Client




Article nr. : MTD_Fat Client

MTD Clients	MTD_FAT CLIENT
Monitor	22 "
Supply voltage	2x 230Vac
Max. ambient temperature	+45°C
Min. ambient temperature	-10 °C
Protection class	IP20
Wired mouse	Optical
Wired keyboard	Querty
Operation system	Windows 10 IoT Enterprise 2021 Matranda standard software
Cables	HDMI Cable

The dashboard of the Fat Client is put together with the client and user, and can feature graphs, push buttons, lights, etc.

The Thick/Fat Client is directly connected to the MTD_Control Module via the same subnet 'Production Network'.

The MTD Fat Clients are equipped with all Matranda software for interfacing with the MTD Control Module and the MTD Server.

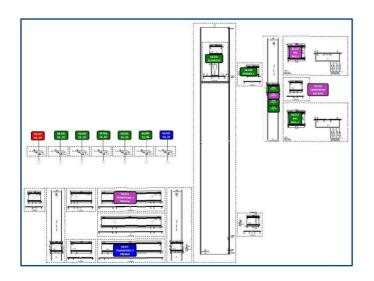

The factory overview software is programmed in the MTD Fat Client. The status of a machine is visible. Which allows immediate intervention. The status of machines/equipment is visualised with a push button. Each colour has a meaning. As soon as the button is pressed, an extra screen will be shown where any malfunction is located, with all documents visualised.

The software is linked to the SVS of the MTD Server. But it can also be further extended for an OEE application, for instance.



MATRANDA, manufacturer and supplier of machine control and data collection with data transport. Trade mark 'Matranda'. All our offers and contracts are subject to our General Terms & Conditions of Supply. Contact : Newtonlaan 115 , 3584 BH Utrecht , +31 (0)84 – 872 89 38 , info@matranda.com , www.matranda.com