

MTD_Thin Client




Article nr.: MTD_Thin Client

MTD Clients	MTD_THIN CLIENT
Monitor	21 "
Supply voltage	2x 230Vac
Max. ambient temperature	+45°C
Min. ambient temperature	-10 °C
Protection class	IP20
Wired mouse	Optical
Wired keyboard	Querty
Operation system	Thin OS4 Core
Cables	HDMI Cable

The Thin Client's dashboard comes from an MTD_Fat Client. Using a VPN connection, it is possible to visualise the same dashboard with an MTD_Thin Client as the MTD_Fat Client itself.

The Thin Client is directly connected to the MTD_Control Module via the same subnet 'Production Network'.

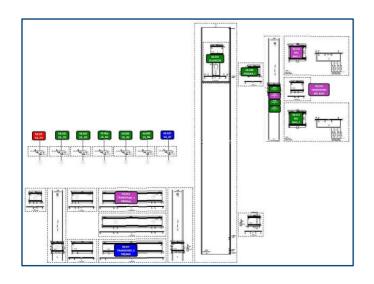

The factory overview software is programmed in an MTD Fat Client. The status of a machine is visible. Allowing immediate intervention. The status of machines/equipment is visualised with a push button. Each colour has a meaning. As soon as the button is pressed, an extra screen will be shown where any malfunction is located, with all documents visualised.

The software is linked to the SVS of the MTD Server. But it can also be further extended for an OEE application, for instance.

